



<https://juliangdianchi.1688.com>

JLbattery

Dongguan Juliang Electronics Co.,LTD.


ADD:2nd Floor, No.1, Hebeiling 1st Road, Guanjingtou , Fenggang Town,
Dongguan City Guangdong Province

✉ +8618938845854 / +8618922990004
☎ clara@juliangdianchi.com

We have been engaged in the battery industry for over 10 years and are a professional battery developer and manufacturer in China, producing and selling over 10 million environmentally friendly batteries annually. We mainly produce polymer lithium batteries, 18650 lithium batteries, battery packs, solar street lights, energy storage batteries, backup power supplies, engineering cases development and other projects. After years of hard work, we have become a designated production base and battery supplier for many leading and well-known enterprises. At the same time, we are also designated by many large companies as battery suppliers for their products..

In addition to providing high-quality products, we also provide battery solutions and purchase other components and accessories according to customer needs. We only produce safe and environmentally friendly mercury-free batteries, and the company has passed the ISO9001 quality management system certification. Most of our products have passed RoHS2.0 (2015/863/EU), MSDS, aviation/maritime cargo transportation reports, UL WERCS, KC certificates, UN38.3, 1.2m drop tests, GB/T 8897.1-2021, CE, IEC international standards, and other standards..

Dual cycle drive strategy of enterprise

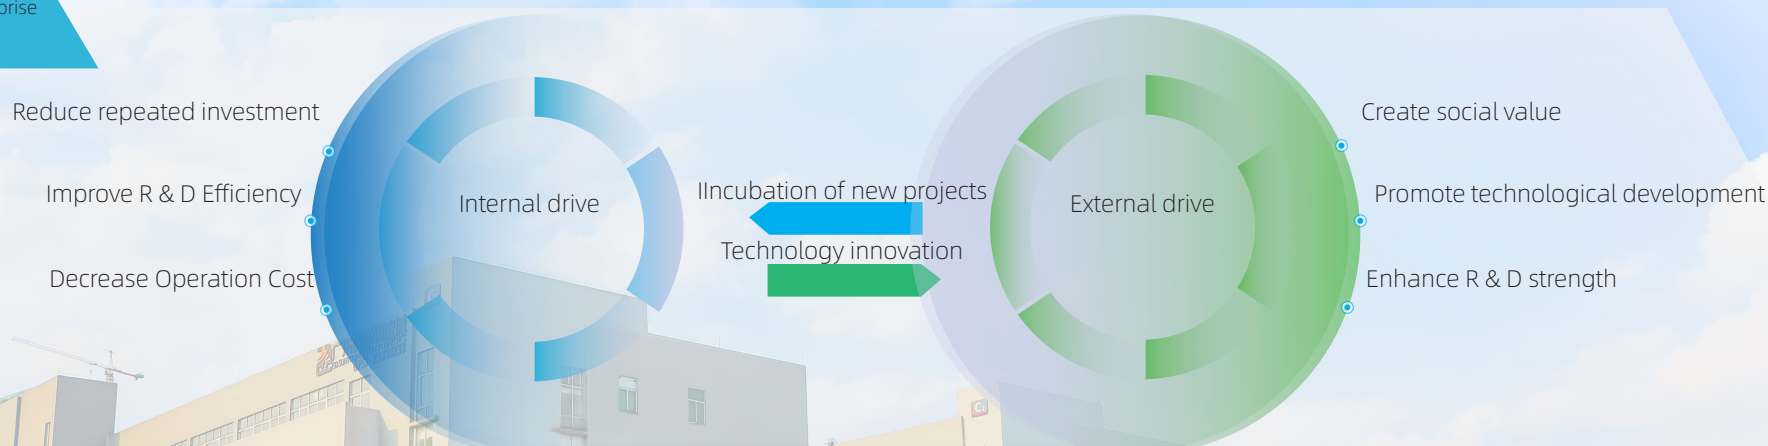

Key account



1

Scale

SHENZHEN Sales area 700 m²
DONGGUAN factory area : 2500 m²

4

Competitive price

Products with excellent cost performance

2

Experience

serve for a billion people

5

Quality control

Strictly control in each process and provide high-quality products

3

First-rate service

Quick response for sale and after-service

6

One-stop Service

Abundant OEM/ODM experience, Whole process service for design/manufacture/logistics

WHY CHOOSE US?

JULIANG comprehensively consider the capacity, power, voltage, appearance, weight, working life, price、 and other factors of the battery , provide high reliable and low maintained battery。

Technical support

Wide application range,Excellent quality,Mercury free and cadmium free。

Product advantage

First-rate service

We have established customer files and provide regular follow-up services to customers.we hold a complete repair and return process,to solve customer's complaint。

Multi channel supply

Complete battery line-up,short lead time and Batch inventory,satisfy custom's large quantity request,support OEM/ODM ,offline sales(B2B),online sales(B2B,B2C)。

Lithium ion battery series

Battery of 3C Digital Products

Application range:

- Medical equipment
- Digital cameras
- Toys
- Power banks
- Smart devices



Product feature : Safe Sufficient capacity High platform Long service time

Model	400909	501012	501015	401220	351525	450840	500935	402020	401730	801230	702030	602535	603065	603040	802540	902831	802070	523450	103040	103048	704050	903448	103450	505573	103665	114065	656090	906090	7565721	9060100	1260110
Standard capacity (mAh)	25	40	60	80	100	120	130	150	200	300	400	500	600	700	800	900	1000	1000	1200	1500	1600	1800	2000	2500	3000	4000	5000	6000	7000	8000	10000
Voltage(V)	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7

Lithium ion battery series

Conventional cylindrical and special-shaped batteries



Application range:

- Electric tool
- Electric drill
- Screwdriver
- Sweeping machine
- Foot grinder

Product feature: Size can be customized Sufficient capacity Strong power Long service time

Model	14430	14430	14430	14500	14500	16300	16310	14650	18500	26650	18350	26650	18650	18650	18650	18650	18650	18650	18650
Standard capacity (mAh)	600	700	750	500	800	650	650	1100	1400	4000	900	1200	1500	1800	2000	2200	2600	3000	3350
Voltage(V)	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7
Size(mm)	Ø14×43	Ø14×43	Ø14×43	Ø14×50	Ø14×50	Ø16×30	Ø16×31	Ø14×65	Ø18×50	Ø26×65	Ø18×35	Ø26×65	Ø18×65	Ø18×65	Ø18×65	Ø18×65	Ø18×65	Ø18×65	Ø18×65

Lithium ion battery series

High magnification

Application range:

- Model aircraft
- intelligent robot
- solar street light
- Industrial equipment/
medical instruments



Product feature : Sufficient multiplying Power High platform Long service time

Model	406888	402035	452550	501447	602530	601444	702035	752035	702030	702560	702540	703462	752540	753060	802540	882540	823462	903048	902540	903052	952540	973944
Standard capacity (mAh)	1800	200	450	280	380	350	380	400	300	1000	500	1300	550	1300	600	750	1600	1050	750	1100	850	1900
Magnification (C)	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Voltage (v)	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7

04 series

Electric motorcycle & tricycle battery series

Application range:

- Electric motorcycle
- Electric tricycle
- Electric scooter
- Cruise ship/vessel
- Energy storage system



Product feature: Lasting electric power Underwritten by PingAn Green & waterproof Long service time

Model	JLB48V 13AH-YY	JLB48V 15AH-265	JLB48V 15AH-295	JLB48V 18AH-325	JLB48V 18AH-DJ	JLB48V 20AH-350	JLB48V 20AH-300	JLB48V 50AH-NG	JLB52V 50AH-NG	JLB60V 50AH-NG	JYB60V 55AH-NG	JYB72V 55AH
Overall dimension (mm)	388×110×75	372×135×88	360×148×68	433×135×88	378×160×83	460×135×188	370×157×167	290×180×180	320×215×160	365×280×200	450×280×200	530×280×200
Chemical system	Ternary lithium	Ternary lithium	Ternary lithium	Ternary lithium	Ternary lithium	Ternary lithium	Ternary lithium	Ternary lithium	Ternary lithium	Ternary lithium	LFP	LFP
Standard Voltage (V)	48	48	48	48	48	48	48	48	52	60	60	72
Charging Voltage (V)	54.6	54.6	54.6	54.6	54.6	54.6	54.6	54.6	58.8	71.4	73	87.5
Standard capacity (AH)	13	15	15	18	18	20	20	50	50	50	55	55
Total weight (KG)	4.0±0.5	4.85±0.5	4.75±0.5	5.6±0.5	5.9±0.5	6.3±0.5	6.0±0.5	20±0.5	16.5±0.5	25.5±0.5	43±0.5	51±0.5
Battery core weight (KG)	3.1	3.85	3.75	4.5	4.5	5.1	4.9	/	13.5	/	/	/

USB Battery Family

First-line charging | 10-year service life | Riveting process

- 1.5V/3.7V/1.2V/9V Various Battery Types



